

Issued - 27 June 2011

Priory Park
Chewton Mendip
BATH, Somerset
BA3 4NT

Tel - +44 (0) 1761 241133 Fax - +44 (0) 1761 241134 www.bathroom-engineering.co.uk

SLOT

This unique showerbed is pre-formed with shallow gradients leading to concealed channels on adjoining sides. Slim 'slot' outlets built into the bed provide an ultra discrete gap between floor & wall. Waste water disappears into channels hidden below the tiles & is taken away to a high volume trap concealed below a removable tiled panel. An exclusive product offering a new generation of engineered solution for the ULTIMATE wet room shower floor

E&OE



PRODUCT CHARACTERISTICS

- Hard compressed Polymer Showerbed with a flat underside, & flat gradient at 1.5% leading to outlet slots along 2x adjoining sides
- Full length integrated channels concealed below close fitting tiles showing 7mm 'slot' outlets
- Removable trap cover c/w floor tile insert for easy access to high volume Horizontal waste & trap
- Perimeter waterproof gasket built into structure, to seal into surrounding floor
- Standard size 1200mm x 1200mm can to cut down to 500mm x 500mm on site
- OPTIONAL matching extension piece 1200mm x 600mm
- Multi-combinations offer a max. 2400mm x 2400mm when building 4x 'SLOT' into single installation, giving a potential 160 litre / minute capacity

APPLICATIONS

Slot creates a superior ready to tile floor in a shower area or in a wet room type bathroom. Suits:

- En-suites & Designer Bathrooms
- Refurbishments & New Build projects
- Floor & Wall Structures -

TECHNICAL DATA

- Size Overall Plan
- Profile
- Gradient
- Waste & Trap
- Installation Kit

TECHNICAL DATA - MATERIAL

- Showerbed
- Waterproofing
- Waste & Trap
- Converting Adaptor

- : Where final presentation is critical to the design
- : All project types
- : Designed for Concrete, easy adaptation to Board / Joist
- : 1200 mm x 1200mm, excl flexible gasket
- : 65mm showerbed, & 130mm overall support incl. trap
- : 2 x 1.5%, leading from diagonal peak to 2 sides
- : DIN 50mm (c/w UK 2" ABS conversion adaptor)
- : All required items to build into floor structure
- : Waterproof High Pressure & Temperature Hard Polymer
- : Standard Factory Finish KMK
- : PP Moulded, suits 50mm Pipe
- : ABS with DIN 50mm Compression > 2" Solvent Weld

Bathroom Engineering $^{\text{TM}}$ is the trading name of Linden Wray Ltd.



Priory Park
Chewton Mendip
BATH, Somerset
BA3 4NT

Tel - +44 (0) 1761 241133 Fax - +44 (0) 1761 241134 www.bathroom-engineering.co.uk

Issued - 27 June 2011

CAPACITY

Waste & Trap : Single outlet 40 litre / minute

: Multiple 'SLOT' combined to max 160 litres / minute

DISPOSAL

Packaging should be disposed of according to local bylaws.

INSTALLATION INSTRUCTIONS

• Separate Sheet : Included in Package

PACKAGING

Cardboard Box : 'SLOT' Showerbed
 Other Items – Install Kit : Pre-packed within box

CONTENTS

Showerbed c/w Factory Fitted Perimeter gasket

• Waste & trap Assembly – Horizontal (Vertical on request)

Stainless Steel tile support for 2x sides


Adjustable & removable tile retainer for waste & trap

Channel Sealing Blocks & adhesive

Instructions & Cleaning Brush

• Converter 50mm > 2" ABS Solvent Weld

Range	Size	ART No.
'SLOT'	Pre-formed Showerbed, Concealed Outlet, Waste & Trap – 12mm Tiles SIZE = 1200mm x 1200mm x 62mm	001.20000250
'SLOT'	Pre-formed Showerbed, Concealed Outlet, Waste & Trap – 22mm Tiles SIZE = 1200mm x 1200mm x 62mm	001.20000251
'SLOT'	Pre-formed Showerbed EXTENSION Piece 1200mm x 600mm	001.20000255
SLOT Installation Kit	Complete installation kit for SLOT Shower Tray System, incl. sealing components.	001.20200258

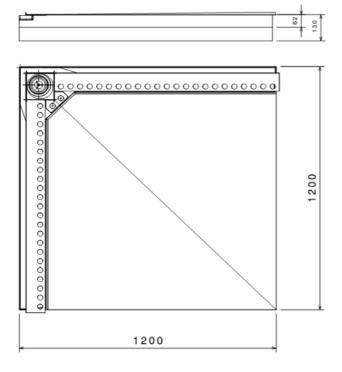

We reserve the right to alter & amend specifications without prior notice
This is not a specification document & does not guarantee performance
© Bathroom Engineering™ May 11