


Bathroom Engineering™
Priory Park
Chewton Mendip
BATH
Somerset
BA3 4NT

Tel: +44 (0) 1761 241133 Fax: +44 (0) 1761 241134 www.bathroom-engineering.co.uk

16 December 2011

# Quattro

A simple range of high quality single point floor drains with high flow rates, in 3x different sizes, & 5x different finish options to match the decoration within the bathroom.

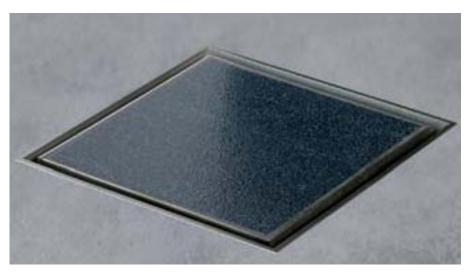



## PRODUCT CHARACTERISTICS

- Small square range of shower drains in 3x sizes (100x100mm,150x150mm,200x200mm), with different grate options
- Made from high quality stainless steel to offer reliability & superior resistance to chemical attack
- Easier fitting to suspended timber floors with off-centre outlet, fitting a rotatable trap assembly (360 degrees) & UK regulations compliant 50mm trap
- Surrounding installation flange helps support the 18mm deep channel into common floor boards, & secures the waterproof sealing gasket that is supplied as standard
- Height adjustable S/Steel Trim Support ensures a foot friendly finish at the channel edge, & allows tile floor finishes
  with a thickness of between 8mm & 18mm to be used. Thicker sizes can be accommodated with care
- Removable Stainless Steel grate comes in different types: polished glass (Black, White, & Aquae Green), tile insert
  or brushed stainless steel. Tile insert grate offering a flat cover or a 12mm recess to insert matching tiles
- Installation Sealing Kit comprising surrounding gasket is fitted at the factory is standard, & should be combined with Waterproofing Systems to seal into the floor structure

#### **APPLICATIONS**

The single point drain is a square gully used within wet room showers & are is offered in 3x different sizes. Suits:

- En-Suites small bathrooms where space efficiency is at a premium.
- Refurbishments & New Build
- Floor Structures Designed for especially for Board over Wooden Joist floors (18mm or more) & can also fit into Concrete floors without alteration.
- Custom Made shower trays, machined from natural stone

## TECHNICAL DATA

• Size (Plan) : 100mm x 100mm / 150mm x 150mm / 200mm x 200mm

Profile : Recess 20mm in Cross Section

Size (Depth) : In addition, trap extends to 90mm depending on trap fitted (110mm total)

Waste & Fault Air Trap : Outlet DN 50mm rotates 360 degrees

Suitable Floor Covering : Natural Stone or Tile up to 18mm thick. Thicker materials optional, call for advice

Installation Sealing Kit : INCLUDED - Waterproof Sealing Gasket to fit surrounding flange

: Optional - AquaeGUARD or AquaeSEAL Waterproof Membranes ~ See Data Sheets

Gradient : A floor gradient of approx. > 2.0% must be built into the surrounding floors

MATERIAL

Channel & Grate : 1.5mm thick 304 High quality Stainless Steel

Trap : ABS

Install Kit : Self Adhesive Rubberised Fleece Tape

## CAPACITY

Waste & Trap 50mm Seal : Horizontal (Up to 48 Litres/min.) location dependant

Bathroom Engineering  $^{\text{M}}$  is the trading name of Linden Wray Ltd. Registered in England  $N^{\circ}$ . 4323895



Priory Park
Chewton Mendip
BATH
Somerset
BA3 4NT

Tel: +44 (0) 1761 241133 Fax: +44 (0) 1761 241134 www.bathroom-engineering.co.uk

16 December 2011

## **INSTALLATION INSTRUCTIONS**

• See Separate Sheet : Included in Package

**PACKAGING** 

• Cardboard box : to suit Shower Channel

*CONTENTS* Supplied in Box

• Single point Floor Drain

- Adjustable ABS Trap Housing Horizontal DN 50mm Outlet
- Waterproof Sealing Gasket Self Adhesive Rubberised Fleece
- Height Adjustable Trim Support & supports
- Cover Grate
- Installation Feet (concrete floors) & Earthing Tag
- Installation Instructions


# **SPECIFICATION**

Bathroom Engineering 'Quattro' Single Point Floor Drain, with flexible sealing collar, factory fitted to chassis, rotating high flowing rotating Multi trap with 48 litre /minute capacity and height adjustable frame, & grate option TILE INSERT, Stainless Steel, Glass\*

\* State colour of glass required

Range	Size	ART No.
Quattro	HiFlow Single Point Floor Drain, 100mm x 100mm, TILE INSERT Grate	008.00150
Quattro	HiFlow Single Point Floor Drain, 100mm x 100mm, ZERO Grate	008.00151
Quattro	HiFlow Single Point Floor Drain, 100mm x 100mm, GLASS Grate*	008.00152
Quattro	HiFlow Single Point Floor Drain, 150mm x 150mm, TILE INSERT Grate	008.00153
Quattro	HiFlow Single Point Floor Drain, 150mm x 150mm, ZERO Grate	008.00154
Quattro	HiFlow Single Point Floor Drain, 150mm x 150mm, GLASS Grate*	008.00155
Quattro	HiFlow Single Point Floor Drain, 200mm x 200mm, TILE INSERT Grate	008.00156
Quattro	HiFlow Single Point Floor Drain, 200mm x 200mm, ZERO Grate	008.00157
Quattro	HiFlow Single Point Floor Drain, 200mm x 200mm, GLASS Grate*	008.00158

\* State colour of glass required

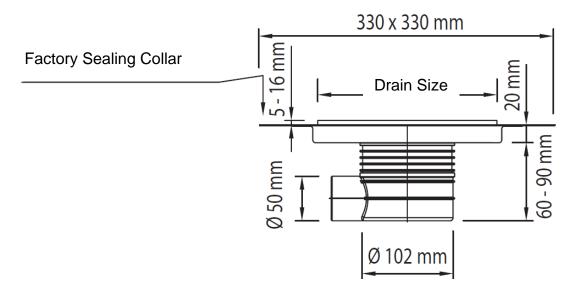

#### E&OE

We reserve the right to alter & amend specifications without prior notice This is not a specification document & does not guarantee performance © Bathroom Engineering™ December 11